



3930

Valvola a sfera, filettatura F/F, cromata, con maniglia.

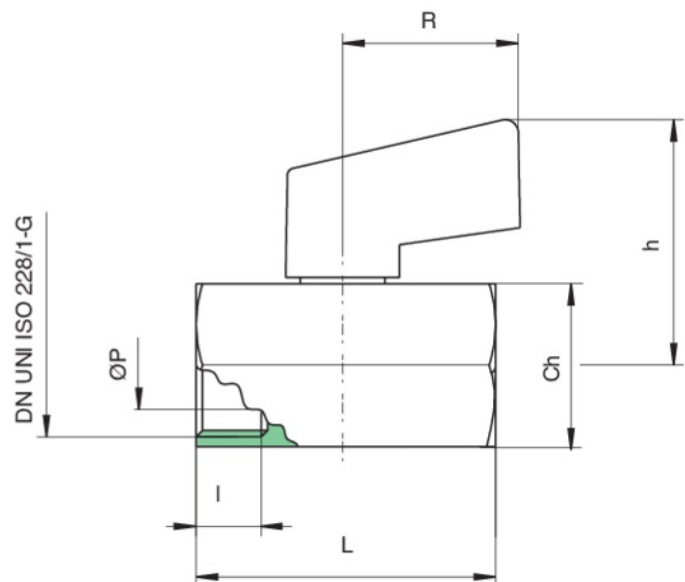

Specifiche tecniche

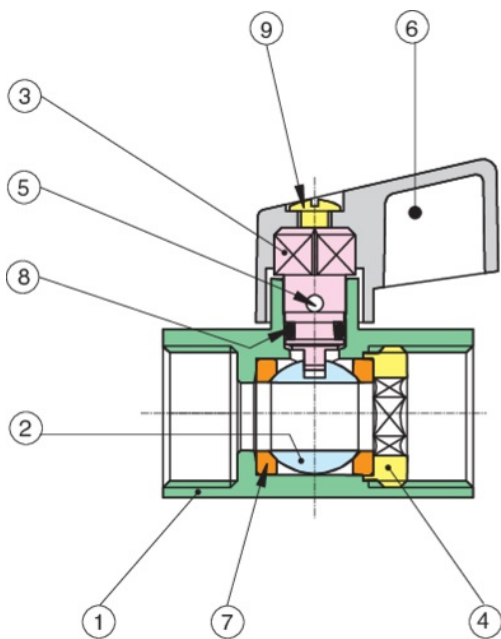

POSIZIONE	NOME PARTE	MATERIALE	N.° PEZZI
1	CORPO	BRASS CW617N UNI EN 12165	1
2	SFERA	BRASS CW614N UNI EN 12164	1
3	ASTA	BRASS CW614N UNI EN 12164	1
4	GHIERA	BRASS CW614N UNI EN 12164	1
5	SPINA	STEEL	1
6	MANIGLIA	PA 6,6	1
7	GUARNIZIONE SFERA	PTFE	1
8	O-RING	FKM	1
9	VITE	BRASS CW614N UNI EN 12164	1

MISURA	DN	BOX	MASTER BOX	CODICE	ØP	I	L	H	CH	R	KV	PN	KG
1/4"	8	40	240	3930020000	8	10	41	36,5	21	27	4,3	10	0,11
3/8"	10	40	240	3930030000	8	10	41	36,5	21	27	2,7	10	0,10
1/2"	15	30	180	3930040000	10	11	46	37,7	25	27	5,4	10	0,14

Limiti di temperatura: -20°C +150°C.

Applicazioni



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE